

# Panel Mount LCD Family

---




## Features

- 6U 15", 7U 17", 8U 19" or 9U 20" TFT LCD screen
- Ultrahigh resolution 20" 1600 x 1200
- NEMA & IP65 option available
- Styled 6mm cast aluminium front panel
- Lower power consumption
- Optional IP65/ NEMA sealed front 2mm protective glass for LCD
- All mounting hardware included
- 240V AC 50Hz. 40 Watts Max, 5 Watts standby with options for 12V, 24V and 48V DC Power
- Options for Capacitive or Resistive touch screen

## Panel Specification

### Monitor


-  Class A LCD panel
- 15" 1024 x 768 LCD with 250 nits brightness and 700:1 contrast ratio typical
- 17" 1280 x 1024 LCD with 300 nits brightness and 1000:1 contrast ratio typical
- 19" 1280 x 1024 LCD with 300 nits brightness and 1000:1 contrast ratio typical
- 20" 1600 x 1200 LCD with 300 nits brightness and 800:1 contrast ratio typical

### Environmental

- Operational temperature range: 0 to 50 Deg C,
- Storage temperature range: -5 to 65 Deg C,
- Humidity operating: 5~90% non-condensing
- Operating Shock: 10G acceleration (11mS duration),
- Operating Vibration: 1G RMS 5 – 500Hz

## Diagram

Unit : mm

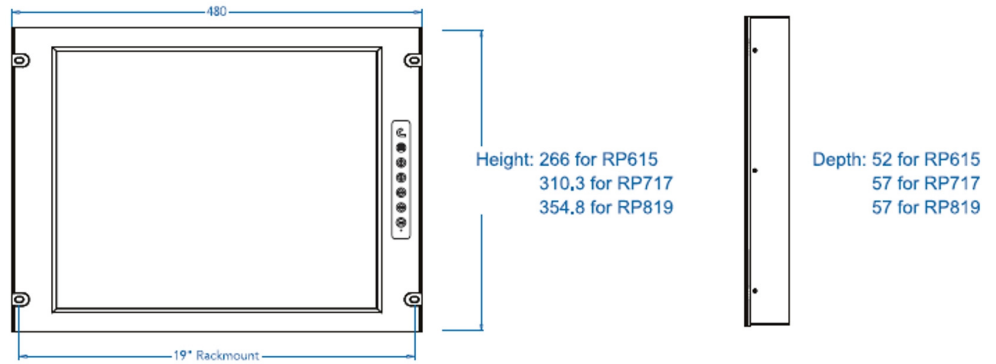

## Dimensions

Model	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
RP615 Series	480 x 52 x 266 mm 18.9 x 2 x 10.5 inch	565 x 406 x 156 mm 22.2 x 16 x 6.1 inch	6 kg / 13 lbs	8 kg / 18 lbs
RP717 Series	480 x 57 x 310.3 mm 18.9 x 2.2 x 12.2 inch	565 x 450 x 156 mm 22.2 x 17.7 x 6.1 inch	7 kg / 15 lbs	8.5 kg / 19 lbs
RP819 Series	480 x 57 x 354.8 mm 18.9 x 2.2 x 14 inch	565 x 495 x 156 mm 22.2 x 19.5 x 6.1 inch	8 kg / 20 lbs	10 kg / 22 lbs

## Westek Technology Limited

Unit 1 Lancaster Park Industrial Estate  
Melksham, Wiltshire SN12 6TT

Telephone +44 (0)1225 790600

Email Sales@westekuk.com